




The gold standard of the automotive service industry now delivers Extra Performance, as part of the exclusive new XP Series of tools. With increased durability, through-handle exhaust, quieter operation, improved throttle control and a countered rubber grip for superior comfort, the 231GXP is a **MUST** have for every automotive service industry professional!

- ◆ 610 Nm (450 ft-lb) of maximum torque in reverse.
- ◆ Through-handle exhaust directs air away from operator and work area.
- ◆ Variable power control, forward & reverse.
- ◆ Pressure feed system provides continuous lubrication.
- ◆ Twin-Hammer Plus impact mechanism with proprietary advanced metallurgy.

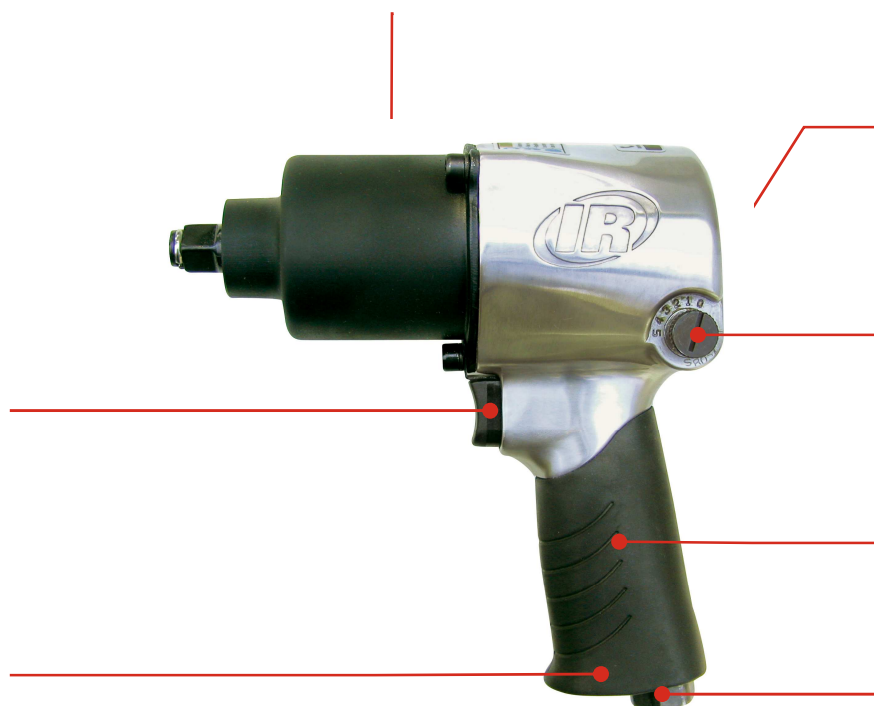

### Specifications at 6.2 bar (90 PSI)

Part number  
Ordering number  
Drive size (square)

**231GXP**  
**10566255**  
**1/2 in**

#### PERFORMANCE

Working torque (forward)  
Working torque (reverse)  
Maximum torque (reverse)  
Recommended fastener size  
Maximum free speed  
Impacts per minute

**25 - 300 ft-lb / 34 - 407 Nm**  
**25 - 350 ft-lb / 34 - 475 Nm**  
**450 ft-lb / 610 Nm**  
**9/16 in / M14**  
**8 000 rpm**  
**1 200**

#### AIR SYSTEM

Air inlet (NPTF)  
Minimum hose size  
Average air consumption  
Air consumption at load

**1/4 in**  
**3/8 in / 10 mm**  
**4.2 cfm / 118 l/min**  
**22 cfm / 616 l/min**

#### NOISE & VIBRATIONS

Sound pressure / power  
Vibration level (ISO8662)

**91.5 / 102.5 dB(A)**  
**4.7 m/s<sup>2</sup>**

#### WEIGHT & DIMENSIONS

Tool weight  
Tool dimensions (l x w x h)  
Shipping weight  
Shipping dimensions (l x w x h)  
UPC/EAN Code

**5.79 lb / 2.63 kg**  
**185 x 67 x 195 mm**  
**6.40 lb / 2.90 kg**  
**240 x 215 x 83 mm**  
**6 63023 01948 2**